



BACKFILL AROUND VAULT MUST BE FLAT AND LEVEL FOR A MINIMUM WIDTH OF 3 FT. ON ALL SIDES.

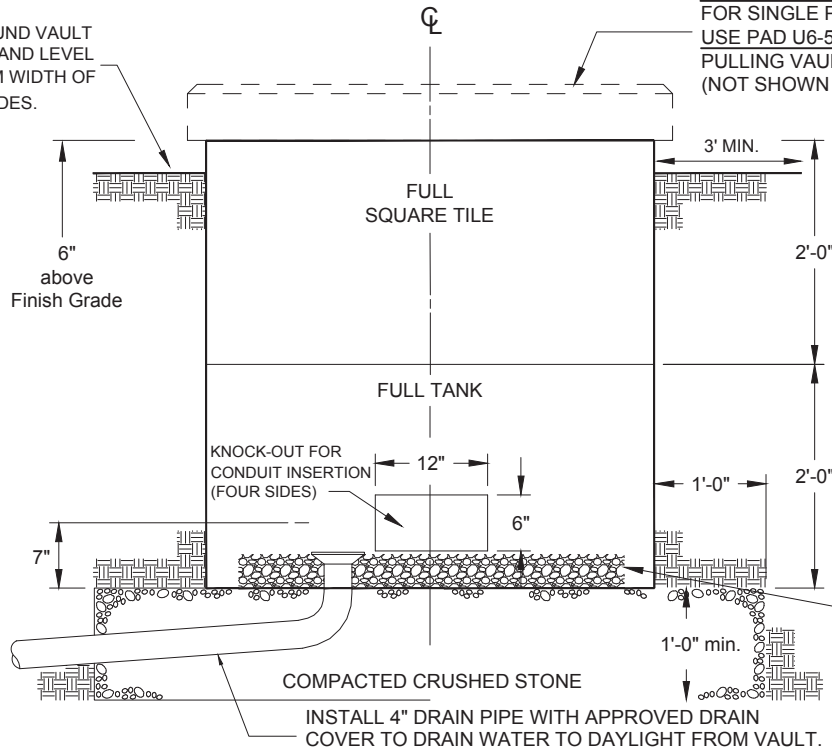

PAD & COVER REQUIREMENTS
 FOR SINGLE PHASE TRANSFORMERS
 USE PAD U6-5A AND WHEN USED AS A
 PULLING VAULT USE COVER U7-5B.
 (NOT SHOWN IN TOP VIEW)

PROVIDE 3" OF CRUSHED STONE ON TOP OF COMPACTED CRUSHED STONE IN BOTTOM OF VAULT.

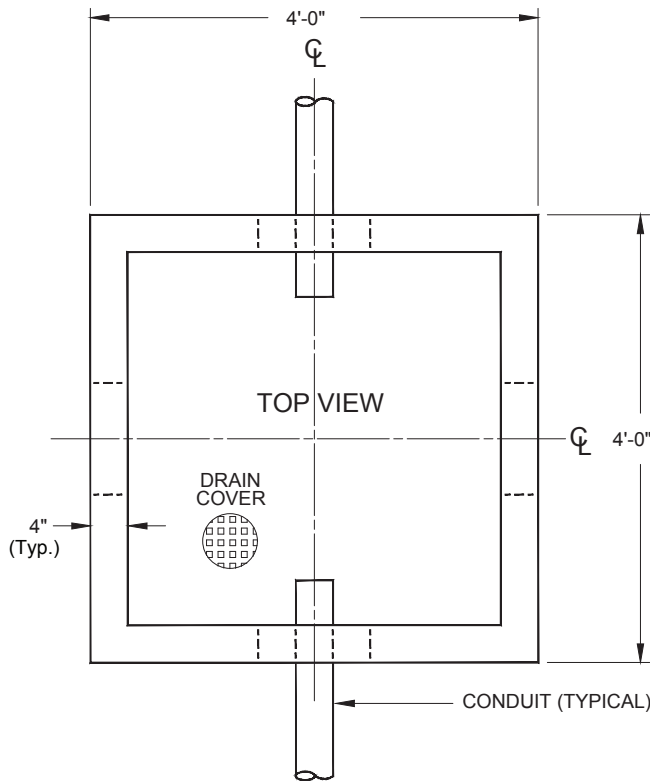

INSTALLATION REQUIREMENTS

- 1.) IF THE VAULT IS CUT INTO AN EMBANKMENT, NHEC MAY REQUIRE A RETAINING WALL EITHER IN FRONT OR BEHIND THE VAULT TO PREVENT MATERIAL FROM SPILLING INTO OR AWAY FROM THE VAULT.
- 2.) TOP OF VAULT SHALL BE SIX INCHES ABOVE FINISHED GRADE.
- 3.) ALL VAULTS WILL BE CONSTRUCTED WITH A DRAINAGE SYSTEM OF APPROVED PIPE MATERIAL TO DRAIN WATER THAT MAY PENETRATE THE VAULT. THE PIPING SHALL ORIGINATE AT THE LOWEST POINT INSIDE THE VAULT AND BE ROUTED TO FREE AIR AT AN ELEVATION BELOW ITS ORIGIN THAT PROMOTES DRAINAGE..
- 4.) IF VAULT IS LOCATED NEAR THE TRAVELED WAY, NHEC MAY REQUIRE A PROTECTIVE STRUCTURE TO PREVENT DAMAGE.
- 5.) SEAL ALL KNOCKOUTS AFTER CONDUIT IS PLACED.
- 6.) CONCRETE SHALL HAVE A COMPRESSIVE STRENGTH OF 5000 P.S.I. AFTER 28 DAYS WHEN TESTED IN ACCORDANCE WITH ASTM C-39-72(LATEST EDITION).
- 7.) REFER TO MEMBER HANDBOOK SECTION 2 OR CONSTRUCTION STANDARDS TAB 12 FOR FURTHER CLARIFICATION AND DETAILED DESCRIPTIONS FOR UNDERGROUND INSTALLATIONS.