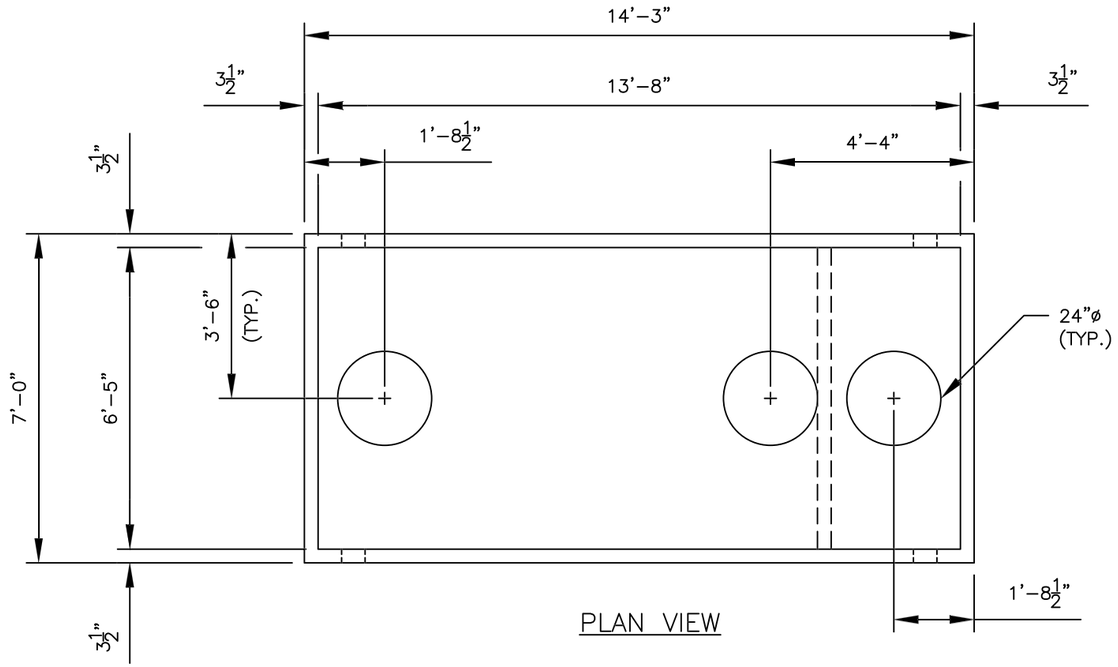

PLAN VIEW

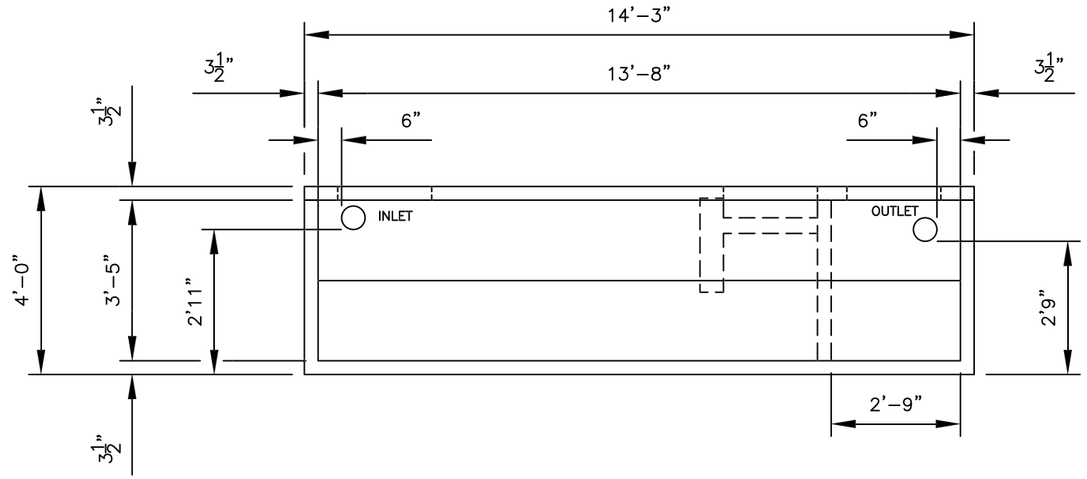

ELEVATION VIEW

NOTES:
1. CONCRETE: 5,000PSI MIN AFTER 28 DAYS.
2. ALL REINFORCEMENT PER ASTM C1227–93.
3. TEES AND GAS BAFFLE SOLD SEPARATELY.
4. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
5. 4" POLYLOK IV CLOSED END BOOTS USED FOR CONNECTIONS.
6. PLASTIC RISER CAN BE POURED INTO COVER.
7. PUMPS & ACCESSORIES OPTIONAL

REV.NO.	DATE	REVISION

PREPARED FOR:

ANDREW J. FOSS CO. INC.
100 COCHECO ROAD
FARMINGTON, NH 03835
PHONE(603)755–2515 FAX(603)278–7878

PREPARED BY:

DELTA
ENGINEERS, ARCHITECTS, & LAND SURVEYORS
184 COURT STREET, BINGHAMTON, NY 13901
TEL: (607) 231–6600 FAX: (607) 231–6650

DATE: 9/16/09	SHEET TITLE: SKETCH	DRWN BY:	GJP
SCALE: N.T.S.		CKD BY:	KMK

PROJECT:
1250 GALLON TANK
300 GALLON CHAMBER
H–10

CONTRACTOR:	DWG. I.D. SK–01
DELTA PROJ. NO.: 2009.367.001	SHT. NO. 1 OF 1